
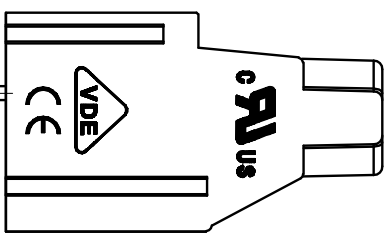
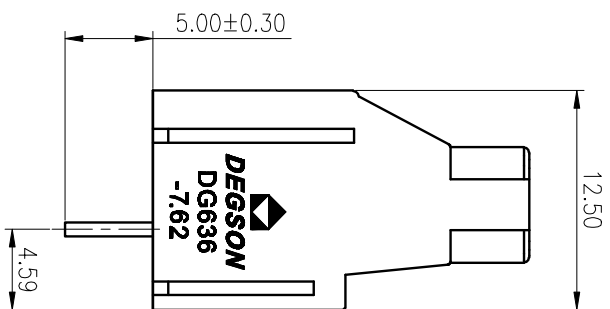


精度等级/General	tolerance/(mm)	0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	±2.50	±Z	±Z

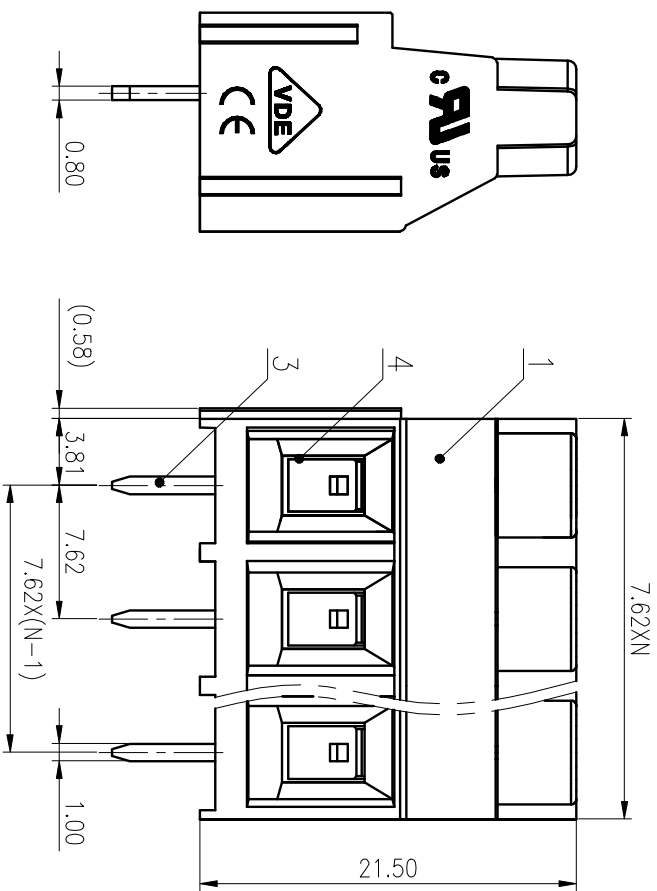

ITEM	NAME OF PART	MATERIAL	NOTES
4	Cage	Copper alloy	M3/NI Plated
3	Pin header	Copper alloy	Sn Plated
2	Screw	Steel	M3/Zn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	300/30	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污秽等级	III/3	III/2	II/2
绝缘/Insulation Degree	/	630/32	/
额定电压/电压/Rated Voltage(V)/Current(A)	/	630/32	/
工频耐压/Withstanding Voltage(kV/1Min)	/	3	/
扭矩/ Torque Tightening(N·m/Lb.in)	M3, 0.5/4.43		
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm² /AWG)	0.2~4.0(5tr)		
可焊/ Pitch(mm)/线径范围/ Poles	0.2~6.0(sol) /26~10		
剥线长度/Stripping length(mm)	7.62/N=02~16P		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS标准/Conform to RoHS	Yes		

DEGSON 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG636-7.62-XXP-1Y-00A(H)

MAT NO.:	/
STATUS:	/
APPD:	Lon CHH 2020.03.18
CHKD:	Yu JZh 2020.03.18
DRT:	CGM 2017.03.02
DRAWING NO.:	DG636-7.62-C01
TYPE:	CUSTOMER DRAWING
SCALE:	2.5:1 SHEET
REV	T1
1/1	

REV	ECN	DESCRIPTION	DRT	DATE
1				
2				
3				
4				

