
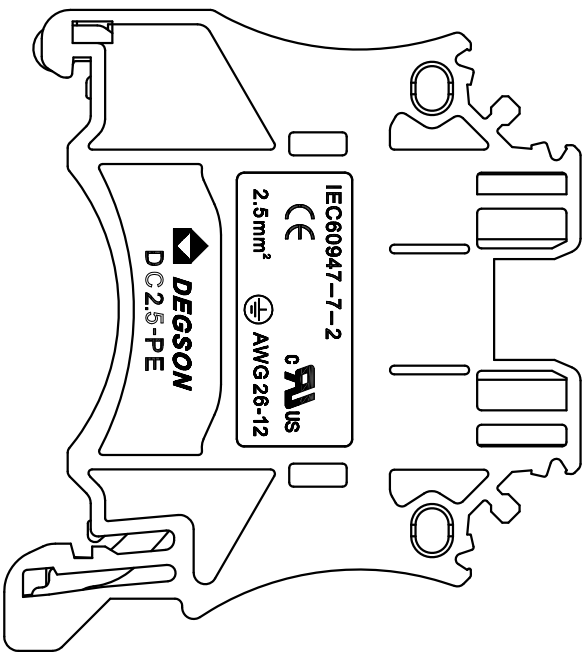


5.10

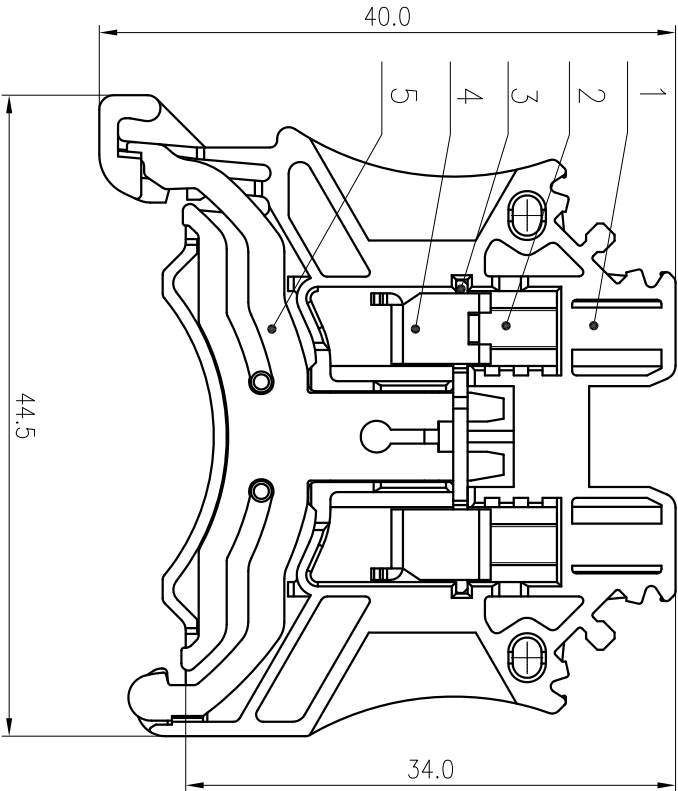

公差表 (General Tolerances)		mm
尺寸范围 (Dimension Range)	公差 (Tolerance)	公差 (Tolerance)
0 ~ 3	>3 ~ 6	>6 ~ 10
3 ~ 6	6 ~ 10	10 ~ 18
6 ~ 10	10 ~ 18	18 ~ 30
10 ~ 18	18 ~ 30	30 ~ 50
18 ~ 30	30 ~ 50	50 ~ 80
30 ~ 50	50 ~ 80	80 ~ 120
50 ~ 80	80 ~ 120	120 ~ 180
80 ~ 120	120 ~ 180	180 ~ 250
120 ~ 180	180 ~ 250	250 ~ 315
180 ~ 250	250 ~ 315	315 ~ 400
250 ~ 315	315 ~ 400	400 ~ 500
315 ~ 400	400 ~ 500	500 ~ 630
400 ~ 500	500 ~ 630	630 ~ 800
500 ~ 630	630 ~ 800	800 ~ 1000
630 ~ 800	800 ~ 1000	>1000
800 ~ 1000	>1000	±0.1/10
>1000	±0.15	±0.2

ITEM	NAME OF PART	MATERIAL	NOTES
5	Grounding	Copper alloy	Sn Plated
4	Cage	Steel	Zn Plated
3	Current Carrier	Copper	Sn Plated
2	Screw	Steel	Zn Plated
1	Housing	PA66	UL94 V-0

REV	ECN	DESCRIPTION	DRT	DATE
1	2	3	4	5

MATERIAL:	SURFACE: /		
MAT NO.:	/		
STATUS:	/		
APPD:	Li GL	2020.05.27	NAME:
CHKD:	Mao J	2020.05.27	DRAWING NO.:
DRT:	XMY	2016.01.29	DC2.5-PE-01P-1Y-00A(H)
SIZE:	A4	TYPE:	CUSTOMER DRAWING
SCALE:	2:1	SHEET:	1/1

EC 标准/IEC Standard:	M2.5, 0.4/3.54
螺丝扭矩/Torque Tightening(N·m/Lb.in)	0.2~2.5/26~12
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	5-10
间距/Pitch(mm)	8-9
剥线长度/Stripping length(mm)	-40~+105
使用温度范围/Operating temperature(°C)	Yes
符合RoHS环保要求/Conform to RoHS	

DEGSON[®] NINGBO DEGSON ELECTRICAL CO., LTD
 宁波高松电子有限公司