



58.0

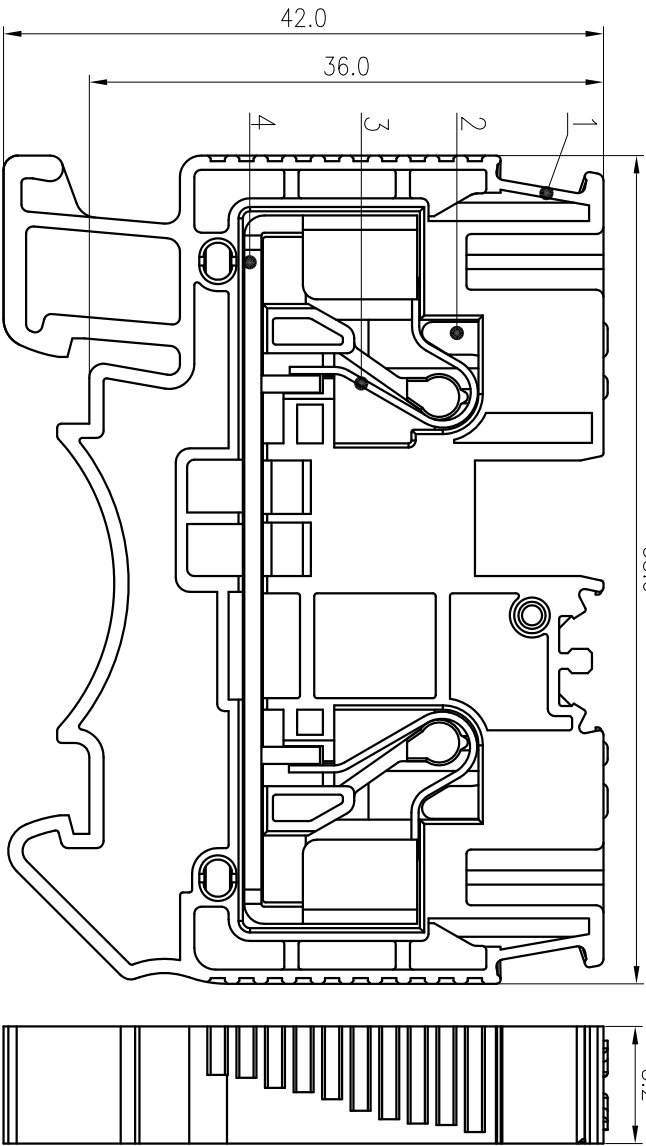

未注公差/General tolerances(mm)	
0	>3
~	>6
~	>10
~	>18
~	>30
~	>50
~	>80
~	>120
~	>180
~	>250
~	>315
~	>400
~	>500
~	>500
±0.12	±0.18
±0.22	±0.26
±0.31	±0.37
±0.57	±0.80
±0.93	±1.05
±1.15	±1.60
±2.20	±2.50
±2	±2

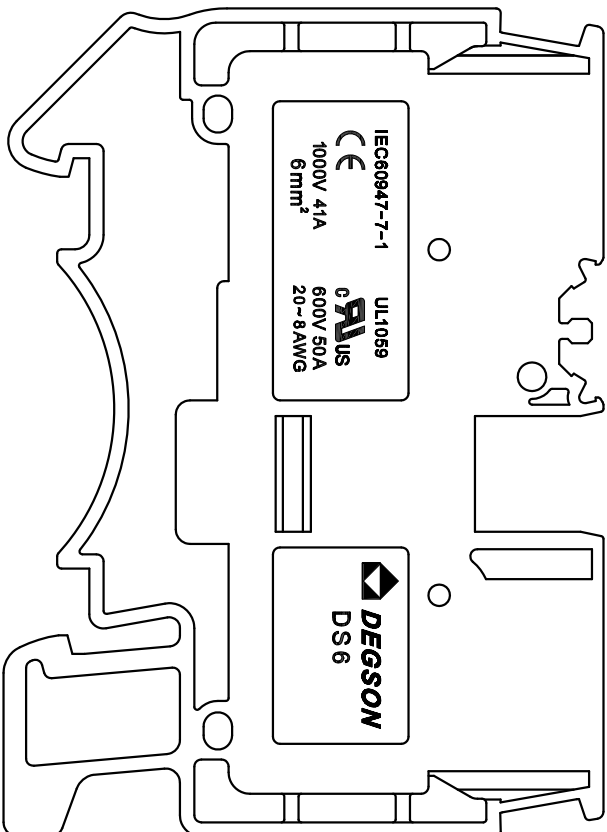

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	600/50	600/50	600/5
EC 标准/EC Standard:			
过压类别/Overvoltage Category/污染等	III/3	III/2	II/2
级/Pollution Degree	1000/41	/	/
额定电压/电流/Rated Voltage(V)/Current(A)	8	/	/
额定冲击电压(KV)/Rate Impulse Voltage(KV)	0.5~6;10(Sol)/20~8	/	/
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	8.2	/	/
间距/Pitch (mm)	10~12	/	/
剥线长度/Stripping Length(mm)	-40~+105	/	/
使用温度范围/Operating temperature(°C)	Yes	/	/
符合RoHS环保要求/Conform to RoHS			

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: Li GL 2020.06.01
 CHKD: Mco J 2020.06.01
 DRT: Chen K 2020.06.01

NAME: **DEGSON**® NINGBO DEGSON ELECTRICAL CO., LTD
 DS6-01P-1Y-00A(H)

DRAWING NO.: DS6-C01
 TYPE: CUSTOMER DRAWING
 SCALE: 2:1
 SHEET 1/1

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94 V-0
2	Button	PA66-GF	UL94 V-0
3	Spring	Stainless steel	
4	Current Carrier	Copper	Sn plated

REV	ECN	DESCRIPTION	DRT	DATE
1	2	3	4	5