
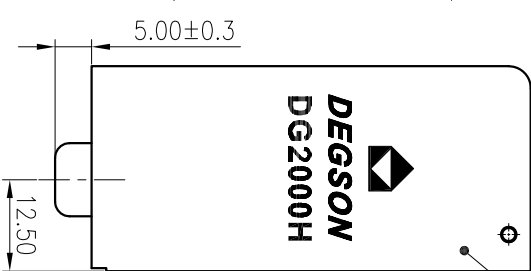



(W/O COVER)
20.0XN+2.0
20.0X(N-1)

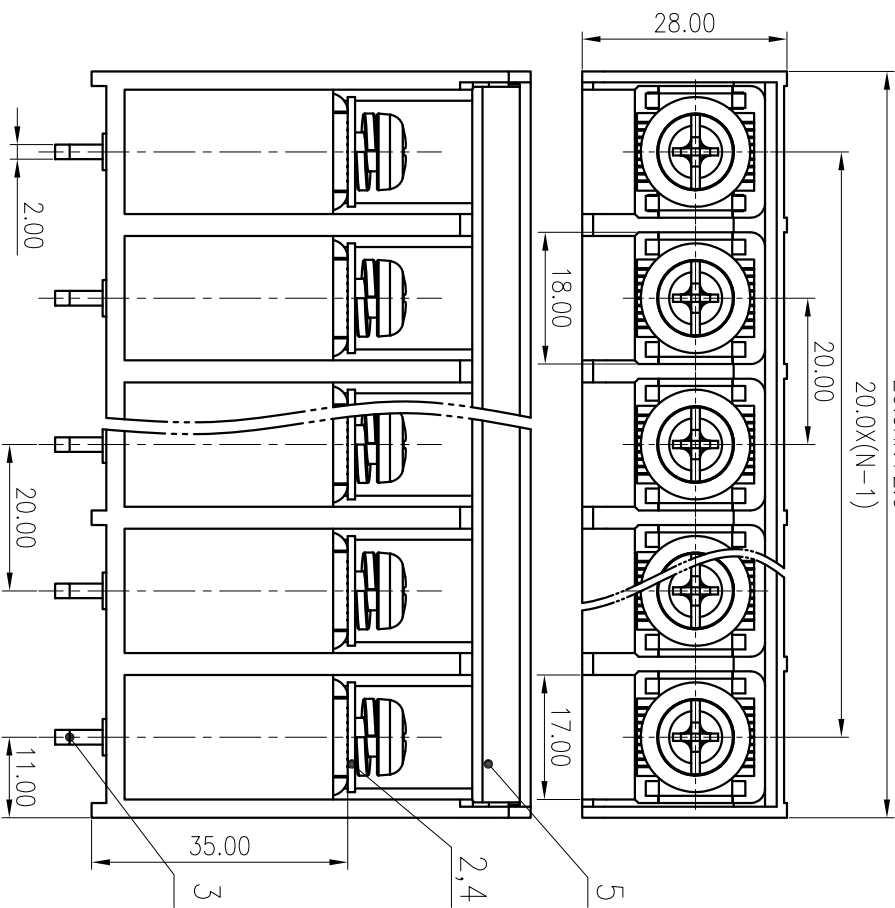

Pitch Range In mm		Nominal Dimension Range In mm					
Over	Over	Over	Over	Over	Over	Over	0.1/10
6	10	10	24	30	60	100	
T0	10	T0	24	T0	60	100	150
6	10	10	24	30	60	100	150
±0.15	±0.20	±0.30	±0.30	±0.50	±0.70	±1.00	±1.30
							±2°

5	Transparent cover	PC	UL94V-2
4	Screw	Steel	Ni Plated
3	Pin header	Copper Alloy	Sn Plated
2	Nut	Steel	Ni Plated
1	Housing	PBT	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电压/Rated Voltage(V)/Current(A)	600/80	600/80	600/75
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	III/2	II/2
额定电压/电压/Rated Voltage(V)/Current(A)	1000/75	1000/75	1000/75
螺丝扭矩/Torque Tightening(N·m/Lb·in)	M6, 2.9	2/6	
线径范围(线径)/Wire Range(flexible)(AWG)	26~4		
间距/Pitch(mm)/线数范围/Poles	20.00/N=02~12P		
剥线长度/Stripping length(mm)	17		
使用温度范围/Operating temperature(°C)	-40~+120		
符合RoHS环保要求/Conform to RoHS	Yes		

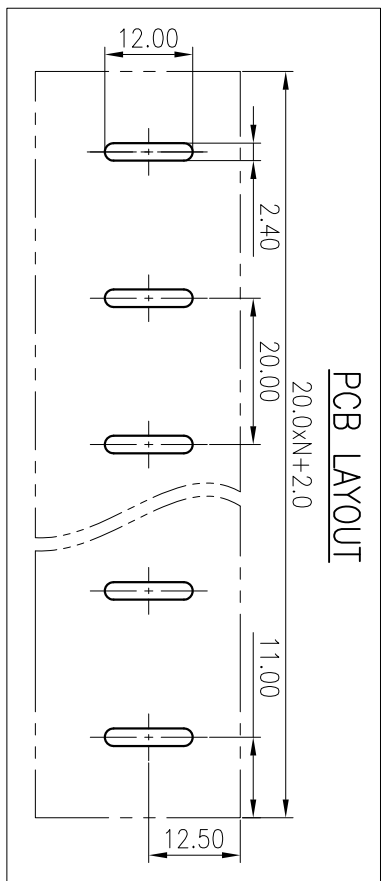

PCB LAYOUT

20.0XN+2.0

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: /

CHKD: /

SURFACE: /

NAME: **DEGSON**® NINGBO DEGSON ELECTRICAL CO., LTD

NAME: DG2000H-B-XXP-1Y-00A(H)

DRAWING NO.: DG2000H-C01

TYPE: CUSTOMER DRAWING

SCALE: 1:1

REV T0

1/1

REV	ECN	DESCRIPTION	DRFT	DATE

1 2 3 4 5 6