
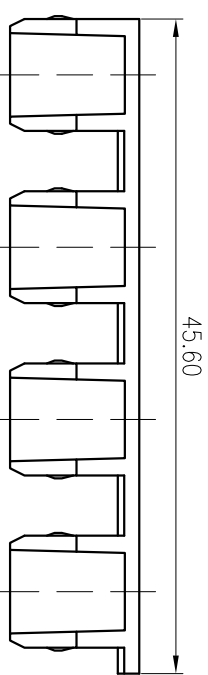
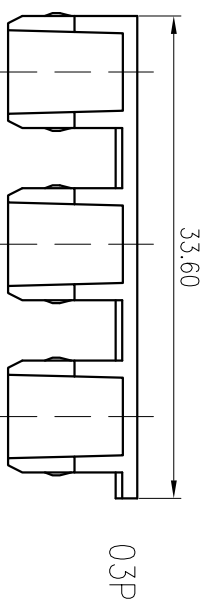
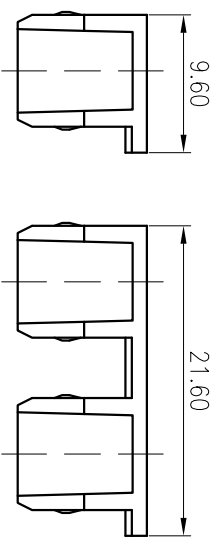
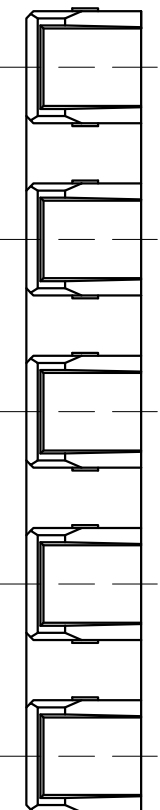

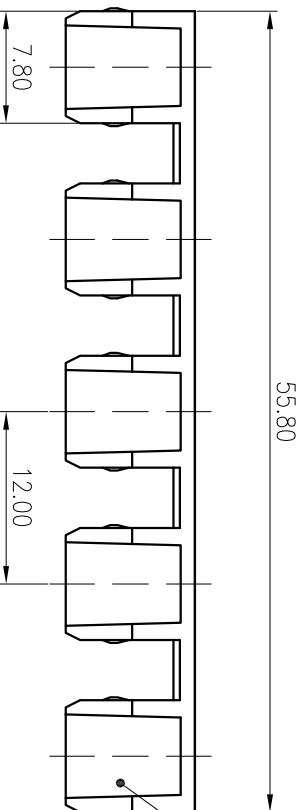


尺寸公差 (General tolerances)(mm)		0.1/10
0	>3	∅
3	~6	∕±7
6	~10	
10	~18	
18	~30	
30	~50	
50	~80	
80	~120	
120	~180	
180	~250	
250	~315	
315	~400	
400	~500	
500	>500	
±0.12 ±0.18 ±0.22 ±0.26 ±0.31 ±0.37 ±0.57 ±0.80 ±0.93 ±1.09 ±1.15 ±1.60 ±2.20 ±2.50		

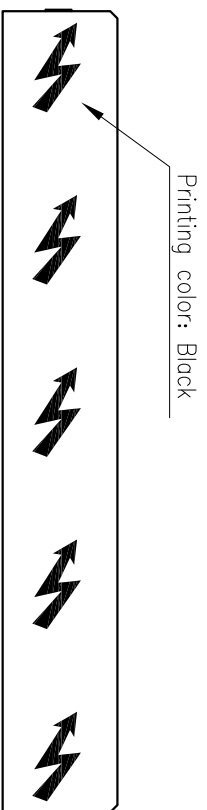

1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
	间距/Pitch(mm)/线数范围/Poles		12.0/01~05P
	使用温度范围/Operating Temperature(°C)		-40~+105
	符合RoHS环保要求/Conform to RoHS		Yes

SURFACE:

DEGSON® 宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: EEA16-XXP-1Y-00A(H)

MAT NO.:	/
STATUS:	/
APPD:	Li GL 2020.06.06
CHKD:	Mao J 2020.06.06
DFT:	Feng X 2020.05.30
DRAWING NO.:	EEA16-C01
REV:	DO-1

REV	ECN	DESCRIPTION	DFT	DATE	SCALE:	SHEET
1					2:1	1/1