

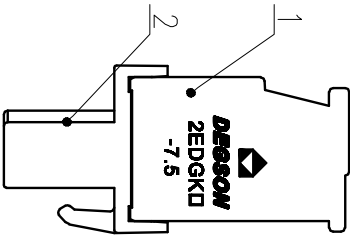
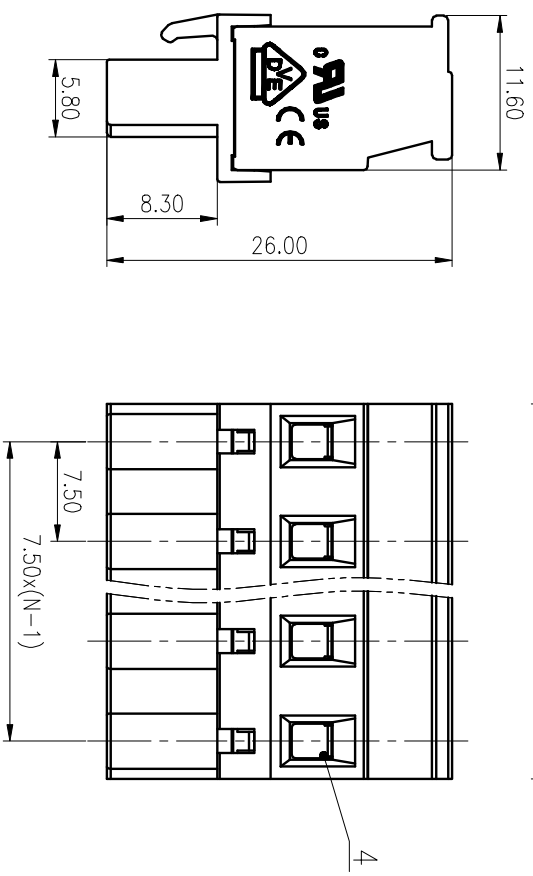


公差表 / General Tolerances (mm)			
0	>3	>18	>315
~	~	~	~
3	6	10	18
~	~	~	~
±0.12	±0.18	±0.22	±0.26
±0.31	±0.37	±0.57	±0.80
±0.93	±1.05	±1.15	±1.60
±2.20	±2.50	±3.15	±4.00
±5.00	±7.00	±10.00	±15.00
±20.00	±30.00	±50.00	±100.00
±0.1/1.0	±0.1/1.0	±0.1/1.0	±0.1/1.0
±2	±2	±2	±2

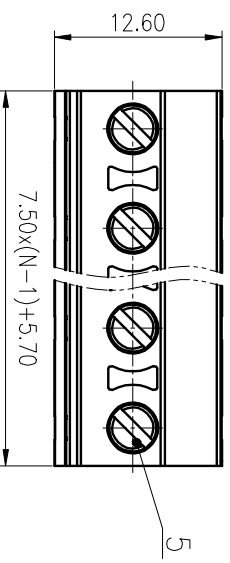

02P: Clasp on the left from this view

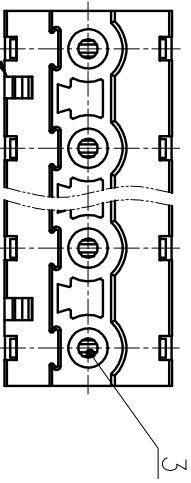

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Clamp	Copper alloy	Sn Plated
4	Cage	Copper alloy	M3/Ni Plated
5	Screw	Steel	M3/Zn Plated

MATERIAL:	/
MAT NO.:	/
STATUS:	/

NAME:	DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD
APPRO: Lgm CHH 2020.05.23	
CHKD: Gong YZh 2020.05.23	
DRAFT: XXY 2014.10.10	
DRAWING NO.:	2EDGKB-7.5-C10
TYPE:	CUSTOMER DRAWING
SCALE:	2:1 SHEET 1/1

REVISION	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				
5				
6				

UL 标准 / UL Standard:	B	C	D
额定电压 / 电涌 / Rated Voltage(V) / Current(A)	300/15	/	300/10
IEC 标准 / IEC Standard:			
过压类别 / Overvoltage Category / 污染等	III/3		
额定电压 / 电涌 / Rated Voltage(V) / Current(A)	/	400/18	/
额定脉冲电压 (KV) / 额定脉冲电压 (KV)	/	4	/
额定扭矩 / Torque Tightening(N·m/Lbin)	M3: 0.5, 4, 4.3		
导线范围 (硬导线/软线) / Wire Range(rigid and flexible)(mm² / AWG)	1.0~2.5 / 28~12		
间距 / Pitch(mm) / 间距范围 / Poles	7.5 / N=02~14P		
剥线长度 / Stripping length(mm)	7		
操作温度范围 / Operating temperature(°C)	-40~+105		
符合 RoHS 环保要求 / Conform to RoHS	Yes		

SURFACE: /

宁波高松电子有限公司
NINGBO DEGSON ELECTRICAL CO., LTD

2EDGKB-7.5-XXP-1Y-1000A(H)

REV	ECN	DESCRIPTION	DRAFT	DATE
1				
2				
3				
4				
5				
6				