
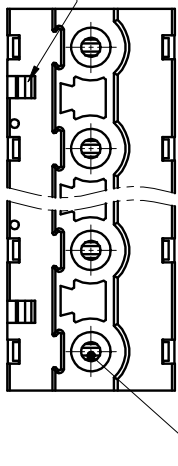
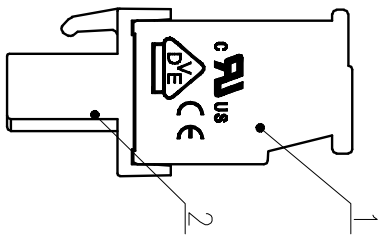
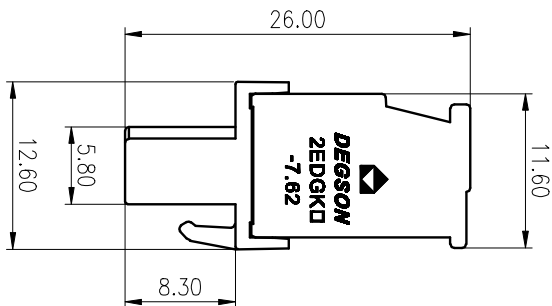
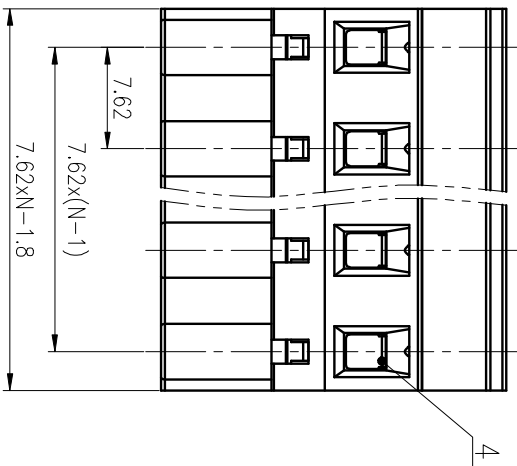


公差等级/General tolerances(mm)		5										6	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
~	~	~	~	~	~	~	~	~	~	~	~	~	±2

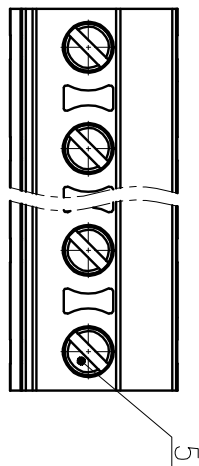

02P: Clasp on the left from this view

MATERIAL: / SURFACE: /

MAT NO.: / STATUS: / APPD: Lon CHH 2020.05.21 NAME: NINGBO DEGSON ELECTRICAL CO., LTD

CHKD:Gong YZh 2020.05.21 CMZ 2017.11.17 DRAWING NO.: ZEDGKB-7.62-C10 TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRAFT	DATE	SCALE	SHEET
1					2:1	1/1

ITEM	NAME OF PART	MATERIAL	NOTES
1	Housing	PA66	UL94V-0
2	Cover	PA66	UL94V-0
3	Clamp	Copper alloy	Sn Plated
4	Cage	Copper alloy	M3/Ni Plated
5	Screw	Steel	M3/Zn Plated

UL 标准 / UL Standard:	B	C	D
额定电压/电压 / Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准 / IEC Standard:	III/3		
过压类别 / Overvoltage Category / 污染等级 / Pollution Degree	III/2		
额定电压/电流 / Rated Voltage(V)/Current(A)	400/18		
额定脉冲电压 (KV) / Rated Impulse Voltage(KV)	4		
额定扭矩 / Torque Tightening(N·m/Lbin)	M3: 0.5, 4, 4.3		
导线范围 (硬导线/软线) / Wire Range(rigid and flexible)(mm ² /AWG)	1.0~2.5/28~12		
间距 / Pitch(mm) / 极间距 / Poles	7.62/N=02~14P		
剥线长度 / Stripping length(mm)	7		
操作温度范围 / Operating temperature(°C)	-40~+105		
符合RoHS环保要求 / Conform to RoHS	Yes		