
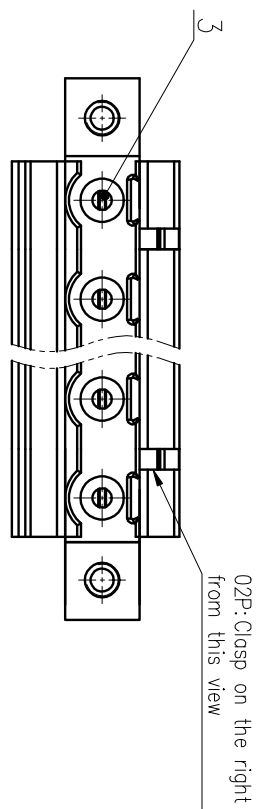
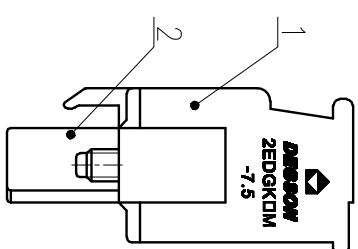
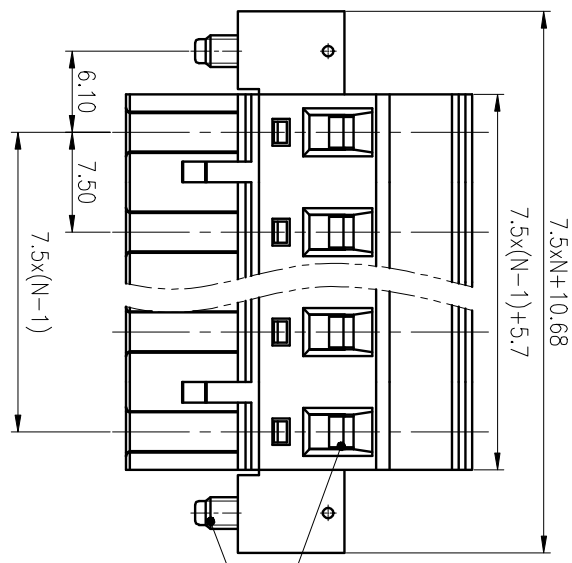


公差/General Tolerances(mm)		公差/General Tolerances(mm)										公差/General Tolerances(mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/1.0
~	~	~	~	~	~	~	~	~	~	~	~	~	~
3	6	10	18	30	50	80	120	180	250	315	400	500	~
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50
													±2

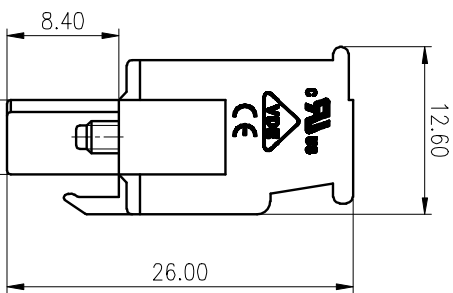

ITEM	NAME OF PART	MATERIAL	NOTES
5	Screw	Steel	M2.5/7n Plated
4	Cage	Copper alloy	M2.5/Ni Plated
3	Clamp	Copper alloy	Ni Plated
2	Cover	PA66	UL94V-0
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:		B	C	D
额定电压/电压 Rated Voltage(V)/Current(A)		300/15	/	300/10
IEC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree		III/3		
额定电压/电压 Rated Voltage(V)/Current(A)		/	400/10	/
额定冲击电压 (KV) / Rated Impulse Voltage(KV)		/	4	/
额定扭矩/Torque Tightening(N·m/Lbin)		M2.5, 0.4/3.54		
导线范围 (硬线和软线) / Wire Range(rigid and flexible)(mm²/AWG)		1.0~2.5/28~12		
间距/Pitch(mm)/导线范围/Poles		7.5/N=02~12P		
剥线长度/Stripping length(mm)		7		
工作温度范围/Operating temperature(°C)		-40~+105		
符合RoHS环保要求/Conform to RoHS		Yes		

MATERIAL: / SURFACE: /

MAT NO.: /
 STATUS: /
 APPD: Lon CHH 2020.05.28
 CHKD:Gong YZh 2020.05.28
 DFT: Yin DK 2020.05.28

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**
2EDGKAM-7.5-XXP-1Y-00A(H)

DRAWING NO.: 10002040
 TYPE: CUSTOMER DRAWING
 SCALE: 2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DFT	DATE
1				
2				
3				
4				
5				
6				

10002040
 REV T0