


公差等级/General Tolerances(mm)		公差等级/General Tolerances(mm)										公差等级/General Tolerances(mm)	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	0.1/10
~	~	~	~	~	~	~	~	~	~	~	~	~	±Z
3	6	10	18	30	50	80	120	180	250	315	400	500	±Z
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

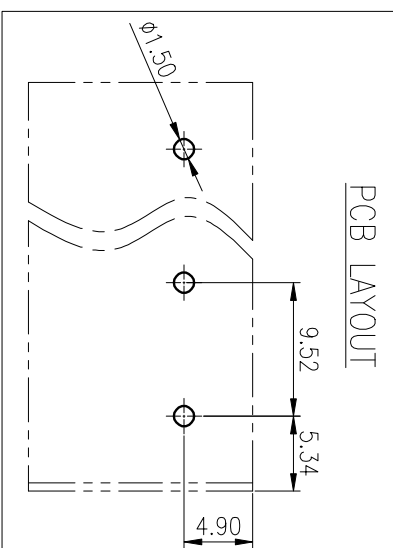

ITEM	NAME OF PART	MATERIAL	NOTES
4	Pin header	Copper	Sn Plated
3	Cage	Copper alloy	M3.5/Ni Plated
2	Screw	Steel	M3.5/Zn Plated
1	Housing	PA66	UL94V-0

UL 标准/UL Standard:	B	C	D
额定电压/电涌/Rated Voltage(V)/Current(A)	300/30	300/30	600/5
IEC 标准/IEC Standard:	过压类别/Overvoltage Category/污秽等级/Pollution Degree		
额定电压/电涌/Rated Voltage(V)/Current(A)	III/3	III/2	II/2
额定冲击电压(RV)/Rate Impulse Voltage(KV)	8	8	6
螺栓扭矩/Torque Tightening(N·m/Lb·in)	M3.5, 0.5/4.43(2P)	0.8/7.02(≥3P)	
线径范围(硬线和软线)/Wire Range(rigid and flexible)(mm²/AWG)	0.2~4.0/30~10		
间距/Pitch(mm)/线径范围/Holes	9.52/N=2~16P		
剥线长度/Stripping length(mm)	7~8		
使用温度范围/Operating temperature(°C)	-40~+105		
符合RoHS要求/Conform to RoHS	Yes		

MATERIAL:

SURFACE:

MAT NO.:

STATUS:

APPD: Lan CHH 2020.05.16

CHKD: Yu JZh 2020.05.16

DRT: Joy.z 2015.06.08

NAME: **DEGSON® NINGBO DEGSON ELECTRICAL CO., LTD**

DG638-9.52-XXP-1Y-00A(H)

DRAWING NO.: DG638-9.52-C01

TYPE: CUSTOMER DRAWING

D

C

B

A

1

2

3

4

5

6

REV ECN DESCRIPTION

DRT DATE

SIZE: A4

SCALE: 2:1 SHEET 1/1