


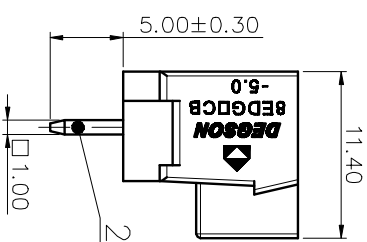
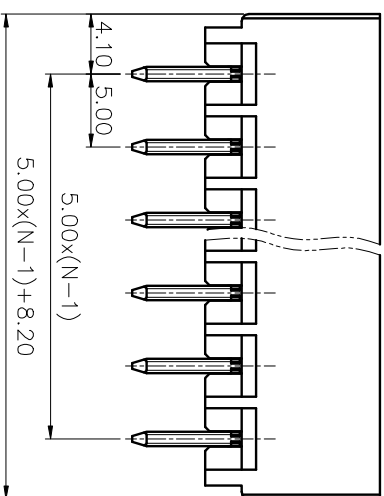

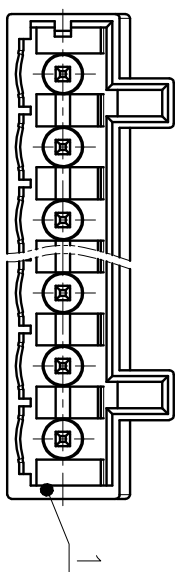


公差等级/General	Tolerances(mm)										0.1/10			
0	>.3	>.6	>.10	>.18	>.30	>.50	>.80	>.120	>.180	>.280	>.315	>.400	0.1/10 ±Z	
3	~	~	~	~	~	~	~	~	~	~	~	±Z		
6	±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15			±1.60

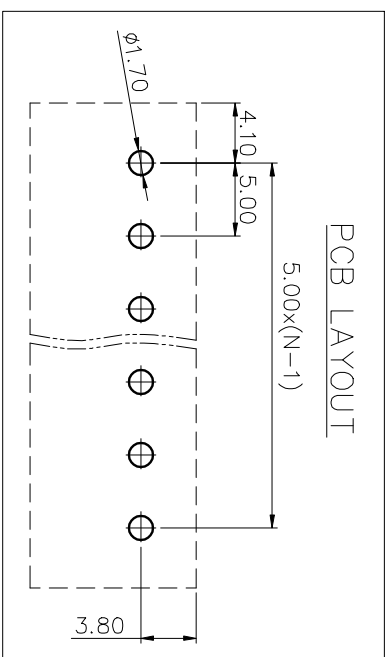

3P



PCB LAYOUT

5.00x(N-1)

φ1.70

4.10

5.00

1.00

REV	ECN	DESCRIPTION	DRAFT	DATE

2	Pin	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准 / UL Standard: B C D			
额定电压/电涌 / Rated Voltage(V)/Current(A) 300/15 / 300/10			
IEC 标准 / IEC Standard:			
过压类别 / Overvoltage Category / 污染等级 Ⅲ / 3 /			
额定电压/电涌 / Rated Voltage(V)/Current(A) 320/20 /			
额定冲击电压 (KV)/Rate Impulse Voltage(KV) 4 /			
间距 / Pitch (mm) / 线数范围 / Poles 5.00 / N=02~24P			
使用温度范围 / Operating Temperature(°C) -40~+105			
符合RoHS环保要求 / Conform to RoHS Yes			
标准颜色 / Standard color number: PANTONE 7534U			
PANTONE / RAL			
SURFACE: /			

MATERIAL:	/
MAT NO.:	/
STATUS:	/
APPD:	/
CHKD:	/
DRAFT:	CenX 2020.06.02
SIZE:	A4
TYPE:	CUSTOMER DRAWING
SCALE:	2:1
REV	T0
SHEET	1/1

NINGBO DEGSON ELECTRICAL CO., LTD
 宁波高松电子有限公司
 NAME: 8EDGVCB-5.0-XXP-11-01A(H)

