
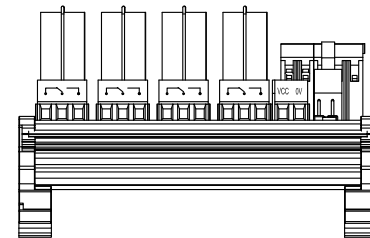
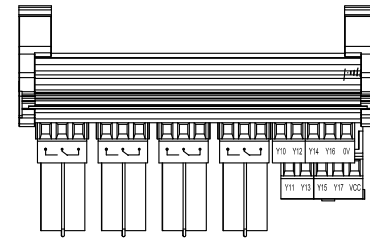
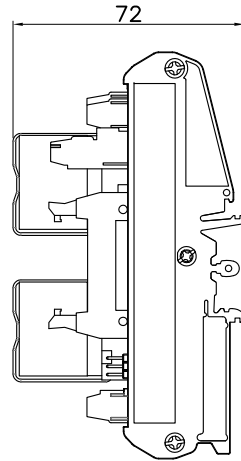


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

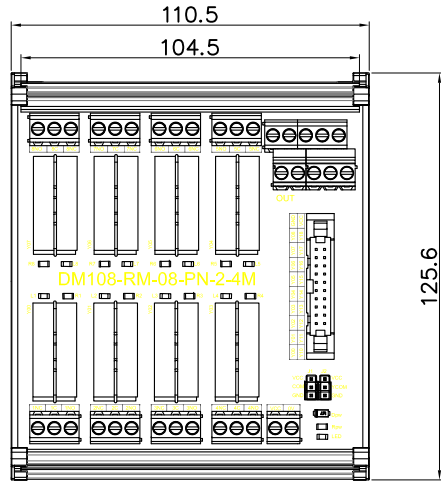

Specifications	
Rated voltage	DC24V
Rated current	22mA
Output Voltage	250V/AC,30V/DC;
output current	16A
contact structure	1CO
Model	8
Signal input method	PNP+NPN
Mechanical life	AC $\geq 10^7$, DC $\geq 2 \times 10$;
Electrical life	$\geq 5 \times 10^4$
Temperature range	- 25℃ ~ +55℃
Status Indicator	YES
Connector digits	IDC 20P
Stripping Length	6-7mm
Terminal torque	0.4Nm (3.54Lb-In)
Input port/wire diameter	DG500-5.08/1.0-2.5mm ² /24-12AWG/IDC 20P
Output port/wire diameter	DG500-5.08/1.0-2.5mm ² /24-12AWG
Installation Method	35mmDIN

PART NO.:	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD			
APPD:	NAME: DM108-RM-08-PN-2-4M-0XA(H)			
CHKD:	TITLE: ASSEMBLY DRAWING			
DRFT:	DRAWING NO.: 30000012		REV	
 THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SHEET	1/1
		SCALE	1:1	