
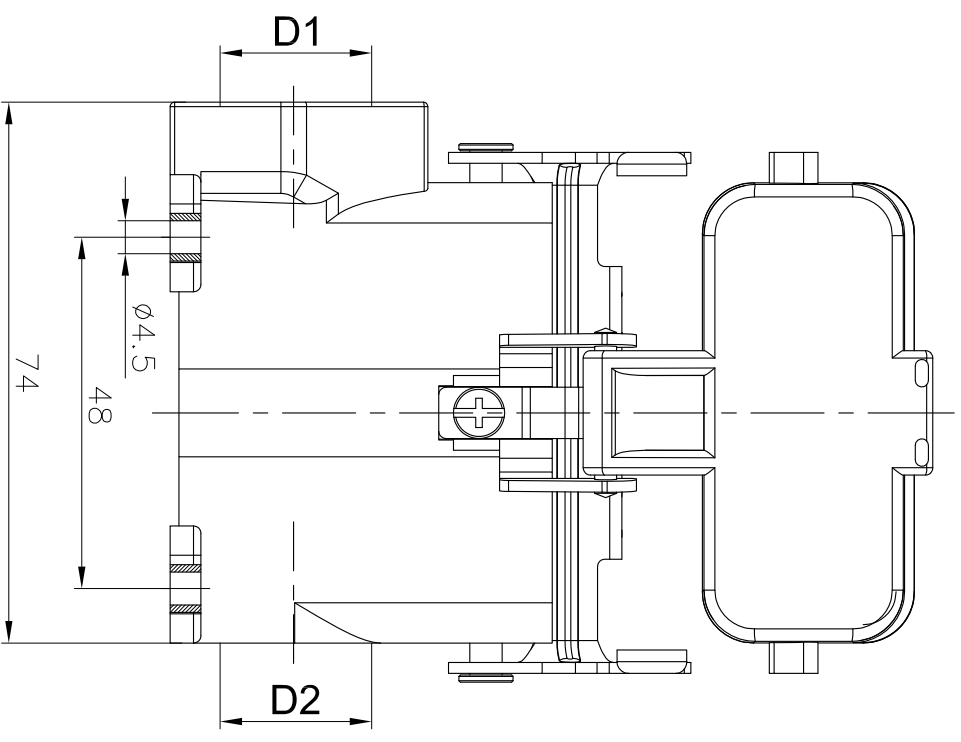


REVISION RECORD				
REV	ECN	DESCRIPTION	DRFT	DATE

TYPE	Thread		Selection
	D1	D2	
D10A-SF-1L-CV-M20	M20	—	
D10A-SF-1L-CV-2M20	M20	M20	
D10A-SF-1L-CV-M25	M25	—	
D10A-SF-1L-CV-PG16	PG16	—	
D10A-SF-1L-CV-2PG16	PG16	PG16	
D10A-SF-1L-CV-PG21	PG21	—	

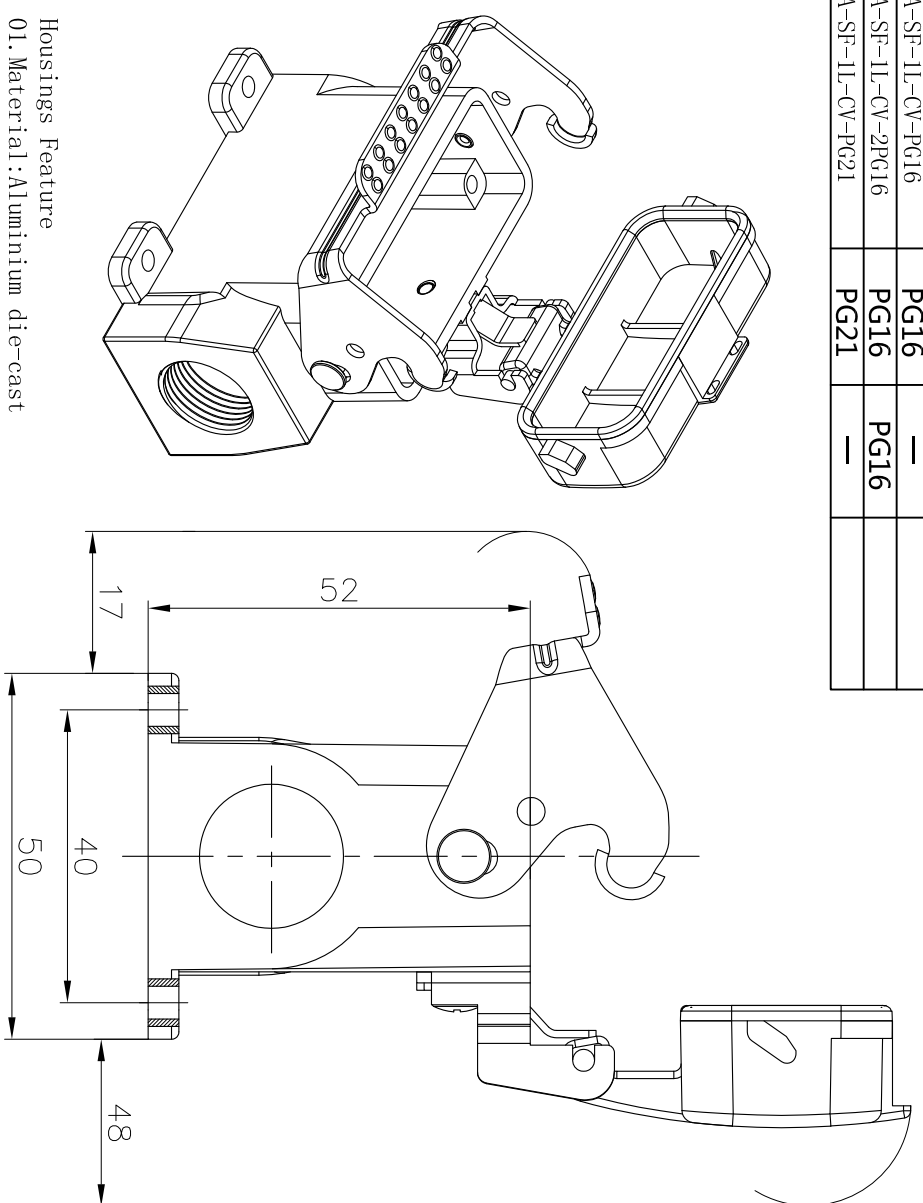

- Housings Feature**
01. Material: Aluminium die-cast
  02. Surface: Powder-coated
  03. Color: grey (RAL 7037)
  04. Covers: Plastic
  05. Material: Metal zinc-plated (Lever)
  06. Limiting temperatures: -40°C ~ +125°C
  07. Flammability acc to UL94: V0
  08. Degree of protection acc. to EN60529 for coupled connector: IP65
  09. Rohs Compliance

DETACHED LISTS			
PART NO.:	<b>DEGSON</b> 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD		
APPD:	NAME: D10A-SF-1L-CV-M/PG		
CHKD:	TITLE: CUSTOMER DRAWING		
DRFT: Mr. yong	2016.08.15	DRAWING NO.:	REV DO-1
THIRD ANGLE PROJECTION		SCALE	1/1
		DO NOT SCALE DRAWING	SCALE 1:1

8 7 6 5 4 3 2 1