


		尺寸公差(mm)				
		0	>30	>60	>100	0.05/10
		~	~	~	~	±T
Rated current	12A	±0.20	±0.30	±0.50	±0.70	±1.00
Rated voltage	300V					
Coil/Contact dielectric voltage	2500V/S					
Dielectric voltage between contact	2500V/S					
Screw torque	1.0Nm					
External connection wire	20-14/0.5-2.5W					
Ambient temperature	G/mm <sup>2</sup>					
Key controlled symbol	-40~+65℃					*
Conform to RoHS						

Printing for laser marking/printing content is clear ,no broken line/rect  
 Seal literal reference according to the foot position in the drawing

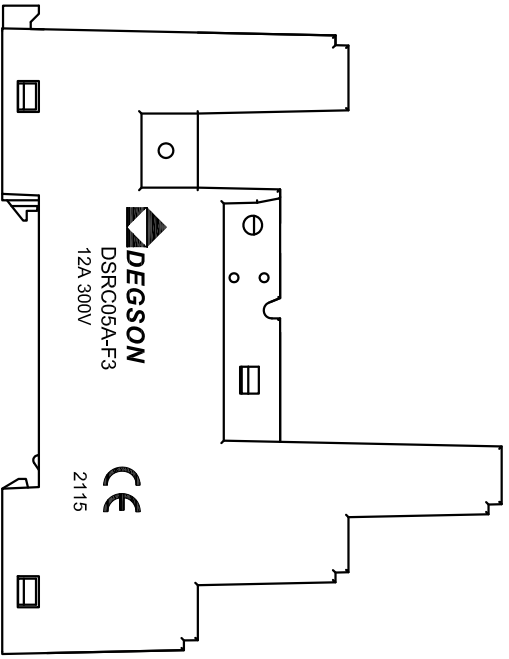

REV	ECN	DESCRIPTION	DRAFT	DATE

1	DSRC05A-F3-00A(H)-N	300190000134	1		
MATERIAL: /		SURFACE: /			
MATERIAL NO.:		300200000063			
STATUS:		/			
APPD:		Description:			
CHKD:		NINGBO DEGSON ELECTRICAL CO., LTD			
DRAFT: long ZM 2021.6.4		DRAWING NO.:		30000371	
SIZE: A4		TYPE: PRODUCT DRAWING		SCALE: 1:1	
REV		REV		TO-1	
1/1		1/1		1/1	

1 2 3 4 5 6

D

C

B

A