

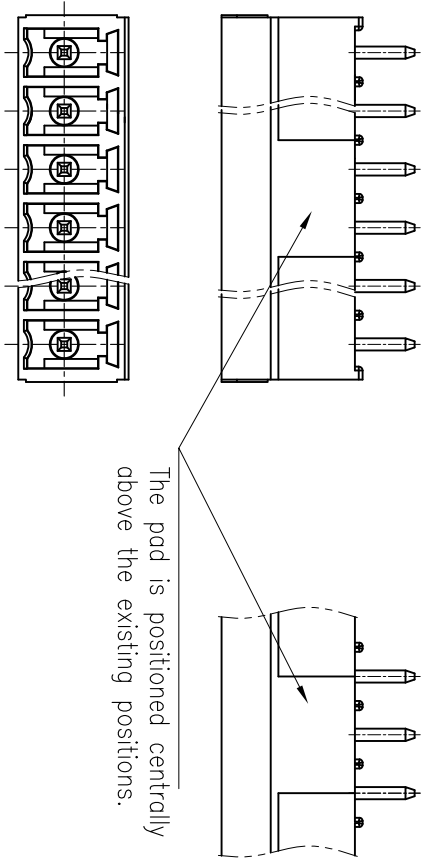
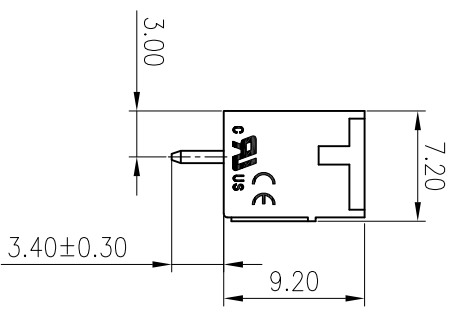



公差/General		公差/General tolerances(mm)										0.1/1.0	
0	>3	>5	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	±Z
~	3	~	6	~	10	~	18	~	30	~	50	~	
±0.17	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50

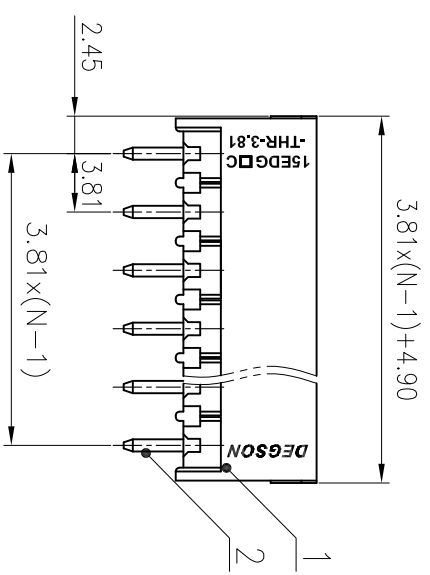

The pad is positioned centrally above the existing positions.



PCB LAYOUT

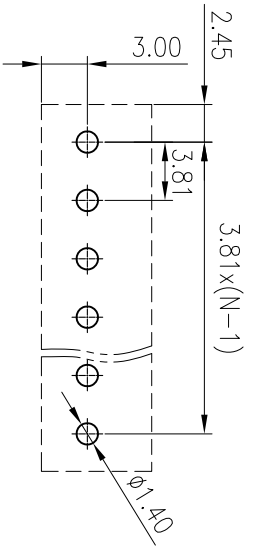

文管中心  
研发专用  
2020.05.19  
(仅限内部使用, 对外无效)

2	Pin	Copper	Sn Plated	
1	Housing	Thermoplastic	UL94V-0	
ITEM	NAME OF PART	MATERIAL	NOTES	
UL 标准/UL Standard:		B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)		300/8	/	/
EC 标准/IEC Standard:				
过压类别/Overvoltage Category/污染等级/Pollution Degree			II/2	
额定电压/电流/Rated Voltage(V)/Current(A)			250/8	
额定脉冲电压(KV)/Rate Impulse Voltage(KV)			2.5	
间距/Pitch(mm)/线数范围/Poles			3.81/N=02~15P	
使用温度范围/Operating temperature(°C)			-40~+130	
符合RoHS环保要求/Conform to RoHS			Yes	

REV	ECN	DESCRIPTION	DRFT	DATE
MATERIAL: /				
SURFACE: /				
MAT NO.: /				
STATUS: /				
APPD: Lan CHH 2020.05.19				
CHKD: Yu JZh 2020.05.19				
DRFT: HZD 2015.08.08				
NAME: 宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD				
DRAWING NO: 15EDGVC-THR-3.81-XXP-1Y-10A(H)				
TYPE: CUSTOMER DRAWING				
SCALE: 2:1	SHEET 1/1	REV DO-1	REV DO-1	1/1