

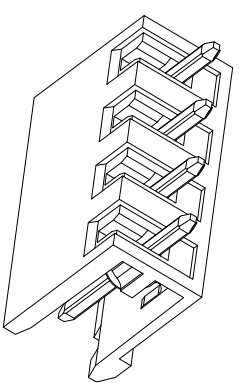
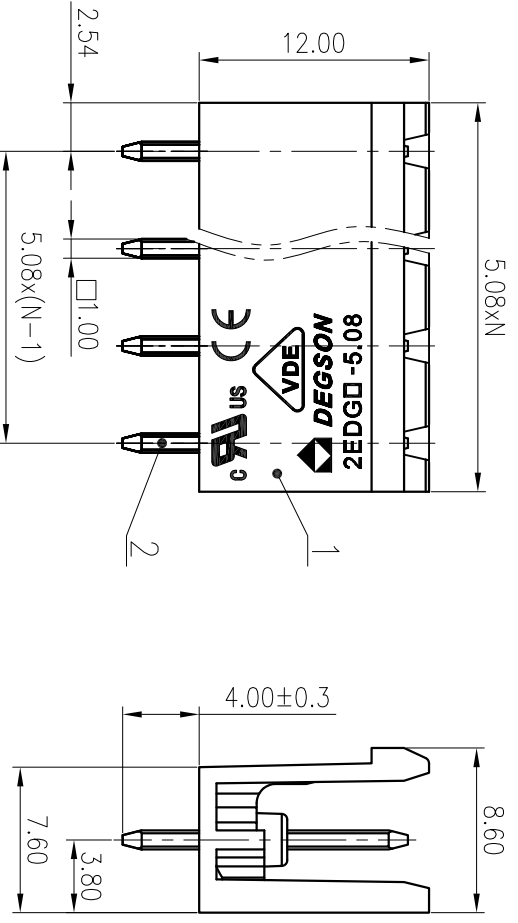


公差/General Tolerances(mm)		0.1/10
0	>3	±0.1
~	>6	±0.15
~	>10	±0.2
~	>18	±0.25
~	>30	±0.3
~	>50	±0.4
~	>80	±0.5
~	>120	±0.6
~	>180	±0.8
~	>250	±1.0
~	>315	±1.2
~	>400	±1.5
~	>500	±2.0
±0.12	±0.18	±0.22
±0.26	±0.31	±0.37
±0.57	±0.67	±0.80
±1.05	±1.15	±1.60
±2.20	±2.50	±2.50
±2		±2

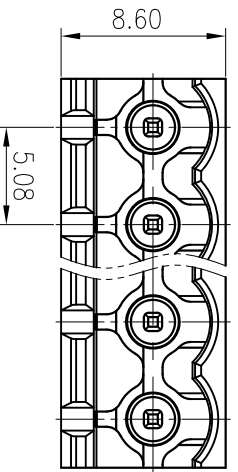

文 管 中 心  
研 发 专 用  
2020.05.13  
(仅限内部使用, 对外无效)

PCB LAYOUT

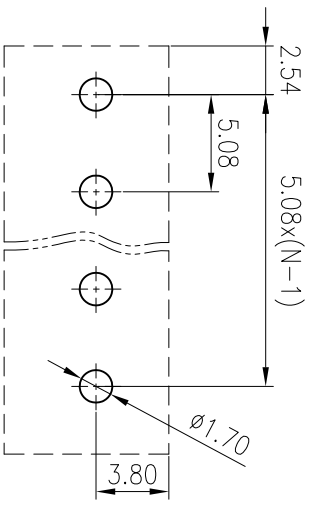

2	Pin header	Copper	Sn Plated
1	Housing	PA66	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES
UL 标准/UL Standard: B C D			
额定电压/Rated Voltage(V)/Current(A) 300/15 / 300/10			
VDE 标准/VDE Standard:			
过压类别/Overvoltage Category/污染等级/ Pollution Degree III/3 III/2 II/2			
额定电压/电流/Rated Voltage(V)/Current(A) / 320/20 /			
额定脉冲电压(KV)/Rate Impulse Voltage(KV) / 4 /			
间距/Pitch(mm)/线数范围/Poles 5.08/N=02~24P			
使用温度范围/Operating Temperature(°C) -40~+105			
符合RoHS环保要求/Conform to RoHS Yes			

SURFACE: /

MATERIAL: /

MAT NO.: /

STATUS: /

APPD: LonCHH 2020.05.13

CHKD: GongYzh 2020.05.13

DRFT: LY 2020.05.13

**DEGSON**® 宁波高松电子有限公司  
NINGBO DEGSON ELECTRICAL CO., LTD

NAME: 2EDGV-5.08-XXP-1Y-100A(H)

DRAWING NO.: 10001954

TYPE: CUSTOMER DRAWING

REV	ECN	DESCRIPTION	DRFT	DATE

SIZE: A4	SCALE: 2.5:1	REV	TO
1/1			