



未注公差/General tolerances(mm)											0.1/10		
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250		>315	>400
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~500
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50


A

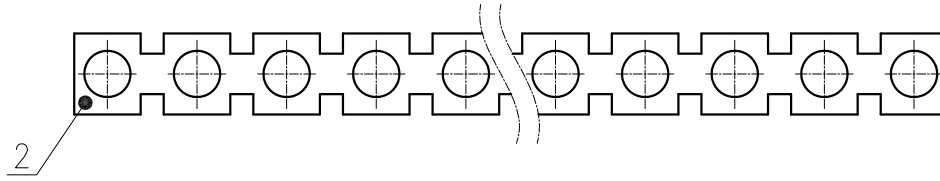

B

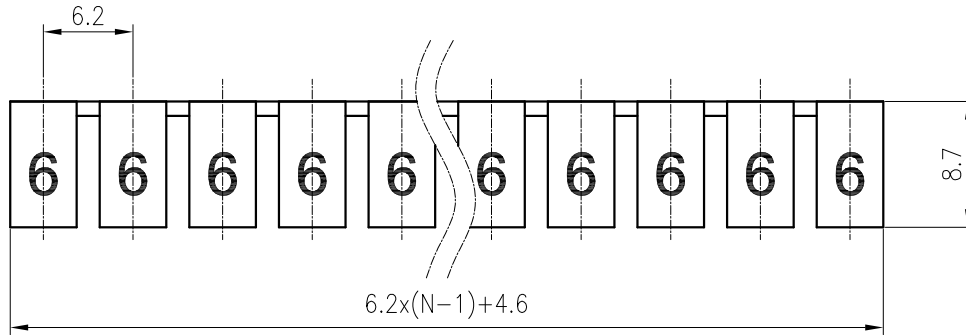

C

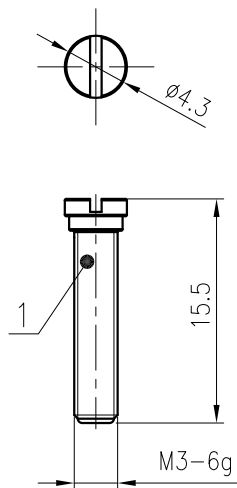

D

2	Current carrier	Copper	Sn Plated
1	Screws	Copper alloy	Ni Plated
ITEM	PART NAME	MATERIAL	NOTES
螺丝扭矩/Torque Tightening(N·m/Lb.in)		M3,0.5/4.43	
间距/Pitch(mm)/线数范围/Poles		6.2/N=02P~10P	
使用温度范围/Operating temperature(°C)		-40~+105	
载流体与螺丝分开包装于同一内盒中/Current carrier and Screws should be packed individually,which must be put in the same box			
符合RoHS环保要求/Conform to RoHS			Yes

MATERIAL:	/	SURFACE: /	
MAT NO.:	/	宁波高松电子有限公司 NINGBO DEGSON ELECTRICAL CO., LTD	
STATUS:	/		
APPD:	Li GL 2020.06.04	NAME: FBIXX-6	
CHKD:	Mao J 2020.06.04	DRAWING NO.: FBIXX-6-C01	
DRFT:	Chen K 2020.06.04	REV	T1
⊕	SIZE: A4	TYPE: CUSTOMER DRAWING	SCALE: 2:1 SHEET 1/1

REV	ECN	DESCRIPTION	DRFT	DATE