
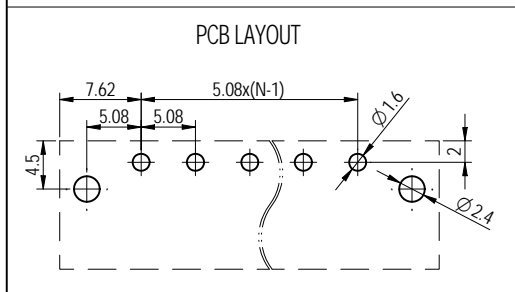
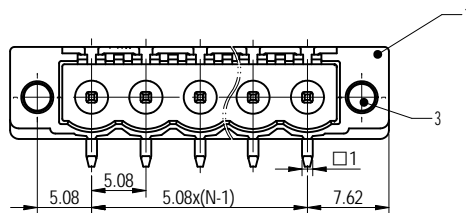

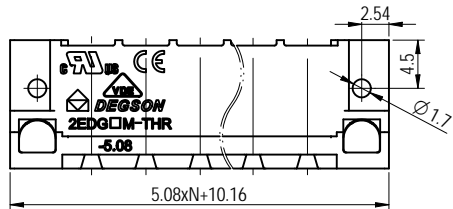
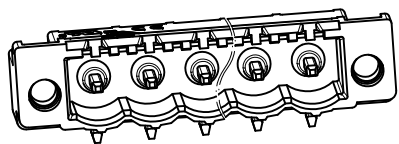
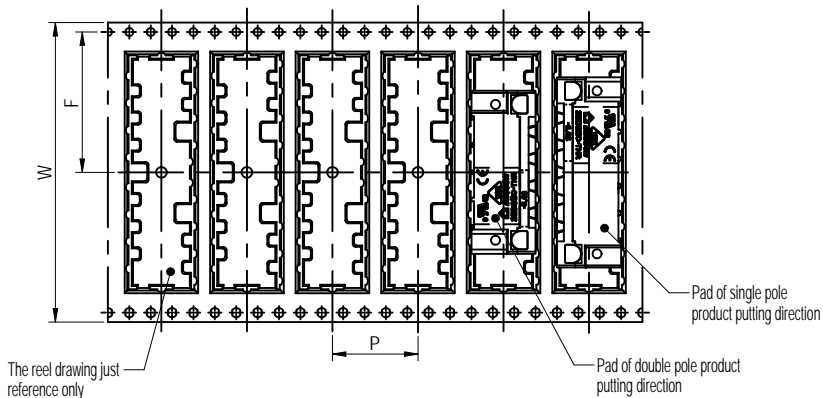


Reel Name	POLE	Width/W	Pitch/P	Width/F	Width/Bo	Qty. pre reel	Reel qty. per carton	Qty. per carton
2EDGRM-THR-5.08-REEL(32)	02	32mm	16mm	14.25mm	20.62mm	330	8	2640
2EDGRM-THR-5.08-REEL(56)	03~06	56mm	16mm	26.25mm	43.72mm	330	5	1650
2EDGRM-THR-5.08-REEL(88)	07~12	88mm	16mm	42.25mm	71.42mm	240	3	720

公差/General tolerances (mm)													D	
0	>3	>6	>10	>18	>30	>50	>80	>120	>180	>250	>315	>400	>500	0.1/10
~3	~6	~10	~18	~30	~50	~80	~120	~180	~250	~315	~400	~500	~2.50	±2
±0.12	±0.18	±0.22	±0.26	±0.31	±0.37	±0.57	±0.80	±0.93	±1.05	±1.15	±1.60	±2.20	±2.50	

SCALE: 1: 1

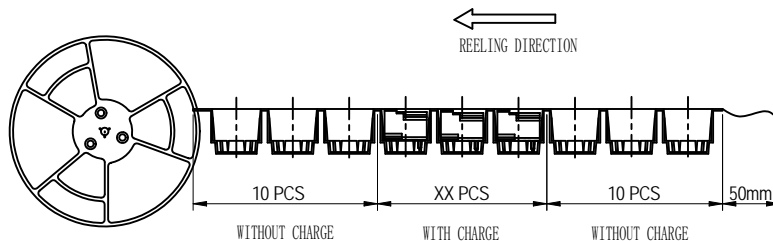

Note:
The A&Z(H) in the name means: A(H) and Z(H).

3	Nut	Copper alloy	Ni Plated
2	Pin	Copper	Sn Plated
1	Housing	Thermoplastic	UL94V-0
ITEM	NAME OF PART	MATERIAL	NOTES

UL 标准/UL Standard:	B	C	D
额定电压/电流/Rated Voltage(V)/Current(A)	300/15	/	300/10
IEC 标准/IEC Standard:			
过压类别/Overvoltage Category/污染等级/Pollution Degree	III/3	II/2	II/2
额定电压/电流/Rated Voltage(V)/Current(A)	320/20	/	/
额定脉冲电压(KV)/Rate Impulse Voltage(KV)	4	/	/
间距/Pitch(mm)/线数范围/Poles	5.08/N=02~12P		
使用温度范围/Operating temperature(°C)	-40~+130		
符合RoHS环保要求/Conform to RoHS	Yes		
标准颜色编号/Standard color number: PANTONE / RAL	/		

DEGSON		MATERIAL:		SURFACE/COLOR:	
APPD: 兰春华	2022.11.15	MAT NO./REV: -	/ 00	MAT STATUS: 批量	
CHKD: 黄耀志	2022.11.15	NAME: 2EDGRM-THR-5.08-XXP-1Y-00A&Z(H)			
DRFT: 方哲盛	2022.11.15	DRAWING NO.	TYPE	DRAWING STATUS	SCALE
		200019580	CUSTOMER DRAWING	已发布	2:1
REV	ECN	DESCRIPTION	DRFT	DATE	SHEET
00			方哲盛	2022.11.15	1/1

REV	ECN	DESCRIPTION	DRFT	DATE
00			方哲盛	2022.11.15

Transfer or duplication of this document as well as the utilization of its contents without the written permission of DEGSON is prohibited. All rights reserved for patent.